



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04B 7/005</p>	A2	<p>(11) International Publication Number: WO 96/11533</p> <p>(43) International Publication Date: 18 April 1996 (18.04.96)</p>
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>(21) International Application Number: PCT/FI95/00551</p> <p>(22) International Filing Date: 5 October 1995 (05.10.95)</p> <p>(30) Priority Data: 944736 7 October 1994 (07.10.94) FI</p> <p>(71) Applicants (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puistotie 1, FIN-02600 Espoo (FI). NOKIA MOBILE PHONES LTD. [FI/FI]; Nakolankatu 8, FIN-24100 Salo (FI).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): HOTTINEN, Ari [FI/FI]; Kielotie 30-32 C 25, FIN-01300 Vantaa (FI). RANTA, Pekka [FI/FI]; Servin Majjan tie 10 B 18, FIN-02150 Espoo (FI). HONKASALO, ZhiChun [FI/FI]; Melkonkatu 8 B 29, FIN-00210 Helsinki (FI). JOKINEN, Harri [FI/FI]; Vähähiidentie 450, FIN-25370 Hiisi (FI).</p> <p>(74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p> </div> <div style="width: 48%; vertical-align: top; padding-left: 10px;"> <p>(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).</p> <p>Published <i>In English translation (filed in Finnish). Without international search report and to be republished upon receipt of that report.</i></p> </div> </div>		
<p>(54) Title: SIGNAL DETECTION IN A TDMA SYSTEM</p> <div style="text-align: center; margin-top: 20px;"> </div>		
<p>(57) Abstract</p> <p>The present invention relates to an improved signal detection method in a TDMA mobile system with co-channel interference. In the method, a primary signal (r_1) and at least one interfering co-channel signal (r_2-r_N) are received on the same TDMA channel (F_1, TS_3). The co-channel signals propagate through multipath channels ($h_{L,1}...h_{L,N}$) independent of one another, which provide them with a unique wave form coding. In addition, the co-channel signals have different but known training sequences. In the invention, the multipath channel estimates of the primary signal (r_1) and said at least one interfering co-channel signal (r_2-r_N) are determined by means of the received training sequences. After this, the primary signal is detected by utilizing the transmission channel estimates of both the primary signal and said at least one interfering co-channel signal. The invention also relates to receivers for implementing the method of the invention.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Larvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Signal detection in a TDMA system

The present invention relates to a signal detection method in a receiver of a TDMA radio system, in which method a primary signal and at least one interfering co-channel signal are received on the same TDMA channel, said signals having different but known training sequences, and said signals having different multipath propagation and thus different transmission channels on the radio path.

In future development of cellular mobile networks, the availability of the radio spectrum will be one of the key problems. In narrowband mobile systems, co-channel interference (CCI) is one of the main factors limiting system capacity. Conventionally, system capacity has been increased in this respect by increasing the geographical re-use of frequencies while decreasing cell size and transmission power. Of course, this is not the preferred manner, since the infrastructure may become intolerably expensive. Another possibility of solving the capacity problem is to follow the rapid development of digital signal processing and to utilize the rather complex interference cancelling algorithms. The removal of co-channel interference in a receiver enables a more efficient re-use of frequencies in a network.

In current mobile systems, co-channel signals are approximated as random additive white Gaussian noise in receivers. However, this approximation is sufficient only if interfering co-channel signals are sufficiently weak, which can be ensured by an appropriate degree of re-use of frequencies in a conventional cellular system. However, this is not the case in interference limited cellular systems. Actually, co-channel interference is typically deterministic in nature, which means that it should be possible to remove at least part of its influence.

Interference cancellation (IC) is already a popular issue in connection with code division multiple access systems (CDMA). Applying interference cancellation techniques to narrowband TDMA systems is, however, basically a more difficult task than in CDMA systems, where information on transmitted wave forms is available in advance in an interference cancelling receiver.

A radio transmitter signal usually undergoes so called multipath propagation, where the signal propagates along several different paths due to obstacles and reflections and arrives at a receiver as several signal components delayed in different ways. In digital systems, this so called time dispersion causes intersymbol interference (ISI), in which interference successive symbols are partly superimposed, which complicates demodulation in the receiver. In the pan-European mobile communications system GSM, a pre-known training sequence is included in a signal to be transmitted, by means of which it is possible to estimate in a receiver the multipath channel via which the signal has travelled on the radio path, and by means of this estimated channel model, to correct the received signal and to use the estimated channel model in the equalizer and demodulator of the receiver in the Viterbi algorithm. The GSM system specifies eight different training sequences in such a manner that it is possible to allocate different training sequences to channels using the same frequencies in cells which are sufficiently close to interfere with one another. A receiver can thus distinguish the correct signal from an interfering signal arriving at the same time. Since in a typical cellular system, such as the GSM, co-channel interference is kept, if possible, as low as possible by means of cellular network frequency planning, it is treated in a receiver merely as random Gaussian noise. Actual channel estimation, equalization and

detection are performed without information on other co-channel signals. This does not cause problems in a correctly planned cellular network, where the distance between cells using the same channel is sufficiently long. However, if the utilization of a frequency band is to be increased by increasing the geographical re-use of frequencies in a cellular network, i.e. by bringing the cells using the same channel closer to one another, or by starting to use the same channels in the entire network like in CDMA systems, problems will arise. The signals superimposed in a receiver thus effectively bias the channel models estimated for each signal, which in turn degrades the performance of Viterbi decoders, for instance. For instance in the GSM system, the cross correlation of training sequences is relatively low, which leads to biased channel estimates for co-channel users. In the GSM system, the training sequences were selected with the emphasis on the auto correlation properties thereof, since the principle in planning the system was not the optimal utilization of bandwidth, the effect of co-channel training sequences being cancelled by using an intercellular distance of at least seven cells in frequency re-use. Thus, in the current TDMA systems, increasing the degree of re-use of frequencies or allowing co-channel users is not possible without essentially degrading the performance of the system and especially that of receivers.

In "Joint Estimation Algorithms for Cochannel Signal Demodulation", K. Giridhar et al., Proceedings of ICC, 1993, and "Joint Demodulation of Cochannel Signals Using MLSE and MAPDS Algorithms, K. Giridhar et al., Proceedings of ICASSI'93, 1993, are disclosed methods in which a detection algorithm detects co-channel signals, but the actual estimates of the co-channel signals are not determined. This is thus only a partial solution to the

problem.

The object of the present invention is thus to improve signal detection in a TDMA mobile system having co-channel interference.

5 This is achieved with a signal detection method in a receiver of a TDMA mobile system, in which method a primary signal and at least one interfering co-channel signal are received on the same TDMA channel, said signals having different but known training sequences, and said
10 signals having different multipath propagation and thus different transmission channels on the radio path. The method is characterized according to the invention by determining the transmission channel estimates of the primary signal and said at least one interfering co-
15 channel signal by means of the received training sequences and detecting the primary signal by utilizing the transmission channel estimates of both the primary signal and said at least one interfering co-channel signal.

The invention also relates to a receiver of a
20 synchronous TDMA mobile system, said receiver being arranged to receive a primary signal and at least one interfering co-channel signal on the same TDMA channel, said signals having different but known training sequences, and said signals having different multipath
25 propagation and thus different transmission channels on the radio path. The receiver is characterized according to the invention in that it comprises a channel estimator, arranged to determine the transmission channel estimates of the primary signal and said at least one interfering
30 co-channel signal by means of the received training sequences, and a detecting section, detecting the primary signal by utilizing the transmission channel estimates of both the primary signal and said at least one interfering co-channel signal.

35 The invention further also relates to a signal

detection method in a receiver of a TDMA mobile system, in which method a primary signal and at least one interfering co-channel signal are received, preferably asynchronously, on the same TDMA channel, said signals having different but known training sequences, and said signals having different multipath propagation and thus different transmission channels on the radio path. The method is characterized according to the invention by determining a transmission channel estimate of said at least one interfering co-channel signal, regenerating an interfering signal from the received signal by utilizing the transmission channel estimate of the interfering co-channel signal, subtracting the regenerated interfering co-channel signal from the received signal, determining a transmission channel estimate of the primary signal, and detecting the primary signal by using this transmission channel estimate.

The starting point of the invention is to utilize the known training sequences of all users of a TDMA system in such a manner that a better channel estimate is obtained for the primary signal. This type of joint estimation of several co-channel signals is necessary because channel estimation is performed in the presence of other co-channel signals, which severely degrade the reliability of the channel estimation due to cross correlation interference. This joint channel estimation utilizes the observation made by the inventors, relating to multipath propagation, that co-channel signals propagate via independent multipath channels, which provide a unique wave form coding for each signal. This wave form coding produces signal states that do not overlap, and thus it enables joint detection and joint channel estimation at a receiver. In the preferred embodiment of the invention, the cross correlation between training sequences is cancelled by performing a linear

transformation on a conventional channel estimate. This can conveniently be carried out as matrix operations, whereby the linear transformation may be for instance a cross correlation matrix of the training sequences of active co-channel users. This requires essentially synchronous reception of co-channel bursts. This restriction is not due to the actual detection algorithm but to the fact that it is necessary to make the training sequences overlap entirely in order to enable the estimation of channel parameters. In practice, even if a synchronized network is assumed, a minor timing error always exists as a result of the propagation delay between co-channel bursts. The channel estimation algorithm of the invention could still recover from asynchronism of at least a few bits, if the training sequence is suitably planned. In using the training sequences of the GSM system, a timing error of about three bits could be allowed, depending on the number of estimated channel taps. If the requirement of synchronous reception is omitted, adaptive methods are used according to a second embodiment of the invention. Only the training sequence of the desired signal, the primary signal, is available at a receiver, and the co-channel must thus be identified by means of "blind" estimation methods. Joint channel estimation and data detection are suggested to be used for this purpose (decision-directed clustering, for instance). Signals can be "cleaned" of interference iteratively by estimating the channel of the interferer, regenerating this interfering signal over the training sequence (convolution of the training sequence with the channel estimate), and subtracting the regenerated signal from the received signal. This method can be used recursively, i.e. by successively estimating and regenerating a user k signal and subtracting it for instance from the sum signal of K co-channel users. Each iteration stage produces a

slightly better channel estimate and data detection. The estimation and regeneration of co-channel signals may also take place as a parallel process.

5 The invention will be described below in more detail by means of preferred embodiments.

Figure 1 illustrates the interference limited TDMA system of the invention, said system having several co-channel users,

10 Figure 2 is a block diagram illustrating the receiver of the invention and wave form coding taking place through multipath propagation,

Figure 3 shows a TDMA burst,

15 Figures 4a, b, c and d are histograms representing the distribution of the mean square errors (MSE) of the channel estimates 11, 12 of the invention and of conventional channel estimates C1, C2, respectively, and

Figure 5 is a block diagram showing the receiver according to the second embodiment of the invention.

20 The present invention can be used in all TDMA mobile systems, when several co-channel users or high co-channel interference are allowed. In the present application, the pan-European mobile communications system GSM is used as an example of a digital TDMA system, without however restricting the invention to it. If
25 required, more detailed information on the GSM system is available in the GSM specifications and in "The GSM System for Mobile Communications", M. Mouly & M. Pautet, Palaiseau, France, 1992, ISBN: 2-9507190-0-0-7.

30 Figure 1A illustrates an interference limited TDMA system of the invention having several concurrent co-channel users. The system comprises N transmitters TX_1, TX_2, \dots, TX_N , which all transmit at the same frequency F_1 and in the same time slot TS_1 . Each transmitter transmits,
35 within the time slot, a short modulated radio-frequency

signal, i.e. a burst, which contains a signal sequence (a bit pattern) $a_{k,1}, a_{k,2}, \dots, a_{k,N}$ to be transmitted. In a manner typical of radio systems, the propagation of the transmitted burst is usually multipath propagation, which means that a signal travels from a transmitter to a receiver Rx along several different paths while reflecting from different obstacles, such as buildings, whereby the signal sequence arriving at the receiver Rx consists of several signal components arriving with different delays. In a mobile system, each co-channel signal has dedicated, different multipath propagation, which can be represented by a multipath channel which has a certain impulse response and which provides a unique wave form coding for the signal. The signal sequences $a_{k,1} \dots a_{k,N}$ transmitted in Figure 1A travel through multipath channels $h_{L,1} \dots h_{L,N}$, respectively, whereby wave form coded signals $r_1 \dots r_N$ are received in the receiver Rx, said signals summing up to a sum signal r_k . The present invention utilizes the wave form coding provided by different multipath channels in cancelling co-channel interference.

Figure 1B shows the discrete time model for Figure 1A. It consists of N co-channel signals, each of which has an independent time-variant complex channel impulse response $h_{0,n}, h_{1,n}, \dots, h_{L,n}$. Vectors $a_{1,n}, a_{2,n}$ represent the transmitted symbol sequences in each N channels, and r_1, r_2, \dots, r_k the received signal sequences in each N channels. A vector v_k consists of independent white Gaussian noise. It should be noticed that the model is simplified in the sense that it assumes the length of a channel memory L to be finite and equal for all channels. However, as regards a receiver, this model describes the system accurately enough, since practical receiver algorithms are usually capable of handling only finite impulse responses.

A received signal, when it is sampled once per

symbol, can be written as follows

$$r_k = \sum_{N=1}^N \sum_{L=0}^L h_{l,n} a_{l-k,n} + v_k. \quad (1)$$

Now, the problem is to detect the transmitted data sequences $a_{k,n}$ in the received signal r_k in the presence of thermal noise. This is possible with high probability if 1) the co-channel signals can be separated, which requires that the N channel responses $h_{l,n}$ are independent and have low correlation, 2) the parameters of the channel or the estimates thereof are known and 3) the noise level is low enough. The first condition is fundamentally essential in order to avoid the overlap of possible signal states at the receiver, which is a basis for all signal detection attempts. Fortunately, the requirement 1) is inherently fulfilled in a mobile environment due to time-variant multipath channels. Another way of seeing this is that multipath channels provide a memory which can be advantageously utilized in the detection process. The condition 2) is also fulfilled since the joint estimation of channel parameters can be carried out for instance by means of different training sequences, which are transmitted through the channels.

Figure 2 shows a simplified block diagram of the receiver according to the preferred embodiment of the invention. Figure 2 contains only the blocks essential for describing the invention, but it will be apparent to one skilled in the art that a conventional TDMA receiver also comprises many other functions and structures the detailed description of which is not necessary in this context. In practice, the receiver may be for instance a receiver normal in the GSM system, in which receiver the joint channel estimation and the joint detection of the

invention are used instead of conventional channel estimation and signal detection. In Figure 2, a sum signal r_k received in an antenna ANT_{RX} is filtered by a bandpass filter 21, which separates the frequencies external to the receiving band. The bandpass filtered signal r_k is applied to a detector DET 22 and to a channel estimator 23. The channel estimator 23 provides the channel estimates h_{ML} of the co-channel signals, which channel estimates the detector 22, preferably a Viterbi detector, uses for detecting the primary signal. In the following, channel estimation and signal detection will be described separately.

Channel Estimation

In the following will be described the joint channel estimation method of several co-channel signals according to the invention by using as an example signals of a GSM type system, in which signals the training sequence is located in the middle of a burst, as in the normal GSM burst in Figure 3. A normal burst contains two 58-bit information packets, which surround a 26-bit training sequence located in the middle. Three "tail bits" (set to zero) are added on both sides of the burst. Since the training sequence is located in the middle of the burst, it is sometimes referred to as a "midamble"

The joint channel estimation method of the invention is necessary, because channel estimation is carried out in the presence of other co-channel signals, which cause severe degradation in the reliability of the channel estimation due to cross correlation disturbance. The cross correlation between training sequences can be removed from a conventional channel estimate by subjecting it to linear transformation. This linear transformation can conveniently be performed by means of matrix operations.

Assume that there are N synchronous co-channels,

i.e. the primary user and $N-1$ interferers each having a different "multipath channel". Denote these N multipath radio channels as follows

5

$$h_{L,n} = (h_{0,n}, h_{1,n}, \dots, h_{L,n})^T, \quad n=1, 2, \dots, N, \quad (2)$$

the length of each of which is $(L+1)$ with complex channel tap weights. Collect the channel impulse responses into a vector h as follows

$$h = (h_{L,1}^T, h_{L,2}^T, \dots, h_{L,N}^T)^T. \quad (3)$$

10

The number of parameters above is thus $N \times (L+1)$. The training sequence, partitioned into preamble and midamble codes, of the n^{th} channel is denoted by

$$m_n = (m_{0,n}, m_{1,n}, \dots, m_{p+L-1,n})^T, \quad n=1, 2, \dots, N, \quad (4)$$

15

with $L+P$ elements $m_{p,n}$, where L is the length of the preamble code, equal to the length of the channel memory, and P is the length of the midamble code. The first L bits are preamble code bits, and the next P bits are midamble code bits.

20

The received signal corresponding to the midamble code bits is thus

$$y = Mh + v \quad (5)$$

25

where v represents Gaussian noise samples, and the matrix $M = (M_1, M_2, \dots, M_N)$, where M_n is $P \times (L+1)$ matrix consisting of the transmitted training sequence symbols organized as a matrix

The maximum likelihood channel estimate is

$$M_n = \begin{bmatrix} m_{L,n} & \dots & m_{1,n} & m_{0,n} \\ m_{L+1,n} & \dots & m_{2,n} & m_{1,n} \\ \vdots & & \vdots & \vdots \\ m_{P+L-1,n} & \dots & m_{P,n} & m_{P-1,n} \end{bmatrix} \quad (6)$$

obtained by the equation

$$\hat{h}_{ML} = (M^* M)^{-1} M^* y. \quad (7)$$

and assuming that the noise is white, the equation (7) is reduced to

$$\hat{h}_{ML} = (M^* M)^{-1} M^* y, = (\hat{h}_1^T, \hat{h}_2^T, \dots, \hat{h}_N^T)^T \quad (8)$$

In other words, this results in the estimates of the multipath channel of the primary signal and the multipath channels of the interfering co-channel signals, which estimates the channel estimator 23 gives to the detector 22 for detection. It should be noticed that the result is equivalent to a conventional channel estimator when $N = 1$. The equation (8) includes a correlation matrix $M^* M$ in brackets, by the inverse matrix of which is produced the linear transformation to a conventional channel estimate according to the invention.

In the embodiment described above, the maximum likelihood estimate is used for a multipath channel, since the cross correlation of the GSM training sequences is high. Alternatively, or in addition to this, better training sequences with regard to cross correlation could be used. Particularly advantageous training sequences are obtained by using a sequence having good periodic autocorrelation and sequences transformed cyclically therefrom with other signals of the same channel (for instance an m-sequence).

In the following example, the improved channel estimate of the invention is examined in comparison with conventional channel estimates.

5 Example

Assume that user 1 has a discrete channel $h_0(z)=1,0+0,5z^{-1}$ and user 2 has a discrete channel $h_1(z)=0,346(1,0+0,2z^{-1})$. Also assume that the GSM training sequences are used for estimating the channels by using the equations (7) and (8) in such a manner that improved channel estimates 11 and 12 and conventional estimates C1 and C2 are obtained. Figures 4a, b, c and d show the histograms representing the mean square errors (MSE) of the improved channel estimates 11 and 12 and the conventional estimates C1 and C2 (the numeral index refers to the user). The improvement obtained by means of the invention in the channel estimate is apparent.

Joint Detection

Signal detection can be implemented for instance by receivers approximating maximum likelihood (ML) or maximum posterior (MAP) decisions. The former is preferably implemented for instance by MLSE (Maximum Likelihood Sequence Estimation) algorithms, such as the Viterbi algorithm and the modifications thereof. The theoretical difference between these two is due to the fact that the MAP detection uses the criterion

$$\max_{a_{k,N}} p(a_{k,1}, \dots, a_{k,N} | r_k)$$

whereas the ML detection uses the criterion

$$\max_{a_{k,N}} p(r_k | a_{k,1}, \dots, a_{k,N})$$

30 The articles by Giridhar mentioned above present

algorithmic methods for the vectorial solutions of the above equations, when $p(\cdot)$ is known.

In the following, let us examine the ML detection in more detail. It is well known that the optimum
 5 detection algorithm in the presence of intersymbol interference (ISI) and white Gaussian noise is MLSE, which can be implemented recursively by the Viterbi algorithm. It has been shown that MLSE can be directly extended to
 10 the detection of multiple co-channel signals with simultaneous ISI compensation. This algorithm is called JOINT-MLSE (JMLSE). By using the standard trellis search technique, it is possible to find the most likely transmitted symbol sequences among all possible sequences
 15 by using the maximum likelihood criterion

$$\max_{\substack{a_{k,N} \\ n \in [1, N]}} [p(r_k | a_{k,1}, a_{k,2}, \dots, a_{k,N})] , \quad (9)$$

where $p(r_k | a_{k,1}, a_{k,2}, \dots, a_{k,N})$ is the joint probability density function of those random variables in the signal r_k which condition the transmitted sequences $a_{k,n}$. The most likely transmitted symbol sequences are those
 20 which maximize the quantity presented above. If the additive noise is independent in the signal r_k , the joint probability density function can be written as the product of the density functions of those samples r_k which condition the transmitted symbols $a_{k,n}$. The equation (9) can
 25 thus be simplified into the form

$$\max_{\substack{a_{k,N} \\ n \in [1, N]}} \left[\prod_{k=1}^K p(r_k | a_{k,1}, a_{k,2}, \dots, a_{k,N}) \right] . \quad (10)$$

In addition, assuming that the additive noise is Gaussian distributed according to the conditional probability density function formulated as

$$p(r_k | a_{k,1}, a_{k,2}, \dots, a_{k,n}) = (2\pi\sigma)^{-1/2} e^{-\frac{1}{2\sigma^2} |r_k - \sum_{n=1}^N \sum_{l=0}^L h_{l,n} a_{l-k,n}|^2} \quad (11)$$

5 it is preferable to apply a logarithm to the equation (10), and the original criterion in the equation (9) can simply be written as

$$\min_{\substack{a_{k,N} \\ n \in [1, N]}} \left[\sum_{k=1}^K \left| r_k - \sum_{n=1}^N \sum_{l=0}^L h_{l,n} a_{l-k,n} \right|^2 \right]. \quad (12)$$

10 This equation simply returns the minimum sum of the Euclidean distances in the $(L+1)$ dimensional space with $2^{N(L+1)}$ possible signal states.

Since the use of the Viterbi algorithm requires a recursive formulation of the probability function, the final form of the JMLSE path metrics is

15

$$J_k(a_{k,n}) = J_{k-1}(a_{k-1,n}) + |r_k - \sum_{n=1}^N \sum_{l=0}^L h_{l,n} a_{l-k,n}|^2, \quad (13)$$

where the term $J_{k-1}(a_{k-1,n})$, $n = 1, 2, \dots, N$ represents the survivor path metrics in the previous response of the trellis. In fact, the path metrics of a conventional Viterbi detector is similar as in the equation (12),
 20 except that n can only have the value 1. In other words, the difference is that in every symbol period, JMLSE weights the symbols $(a_{k,1}, a_{k,2}, \dots, a_{k,N})$ jointly instead of weighting the symbol $a_{k,1}$ alone.

As the final result, the JMLSE algorithm
 25 according to the equation (13) selects for the primary

signal the most likely transmitted symbol sequence $a_{k,1}$ out of all possible symbol sequences, which symbol sequence is provided as an output from the detector 22.

The number of states in the JMLSE trellis is $2NL$.
5 Due to the computational limitations of practical receivers, the product NL cannot be allowed to become very high. This obviously limits that number of co-channel signals which can be jointly detected, or alternatively, the multipath spread which can be tolerated. The
10 complexity of the trellis can however be reduced by using known methods, disclosed for instance in "Reduced State Sequence Estimation with Set Partitioning and Decision Feedback", M.V. Eyuboglu, S.V. Queshi, IEEE Trans. Information Theory, Vol. COM-36, No. 1, p. 13 - 20, Jan. 1988, and "Sequential Coding Algorithms: A survey and cost
15 analysis, Anderson, Mohan, IEEE Trans., Vol. COM-32, p. 1689 - 6696, 1984. However, in TDMA mobile systems it is usually sensible to concentrate only on dominant interferers and treat the others as noise.

20 The channel estimation according to the equations (7) and (8) combined with joint detection requires essentially synchronous reception, as stated above. If, however, the requirement of synchronous reception is omitted, adaptive methods can be used in channel
25 estimation. Only the training sequence of the desired signal is available at a receiver, and therefore the co-channel must be identified by means of blind estimation methods, described for instance in "Blind Deconvolution", S. Haykin, Prentice Hall Information and System Sciences
30 Series, New Jersey, 1994. A method where channel estimation and data detection are combined (for instance decision-directed clustering) can be used for this purpose.

35 Figure 5 shows a block diagram of a receiver suitable for asynchronous reception. The receiver comprises a detector DET_1 and a channel estimator EST_1 for the primary signal, and detectors $DET_2 \dots DET_N$ and channel

estimators $EST_2 \dots EST_N$ for each interfering signal $R_2 \dots R_N$. The received signal r_k is applied to each detector $DET_2 \dots DET_N$ and channel estimator $EST_2 \dots EST_N$ for interfering co-channel signals. Each channel estimator provides the multipath channel estimate $h_2 \dots h_N$ of the corresponding interfering signal, which estimate is applied to the corresponding detector DET_2 and to the second input of a convolution means 51. The detector $DET_2 \dots DET_N$ detects the sequence (training sequence) $a_2 \dots a_N$ of the interfering signal in the received signal by using the provided channel estimate $h_2 \dots h_N$. The convolution means 51 regenerates the interfering signal by performing a convolution of the sequence $a_2 \dots a_N$ and correspondingly that of the channel estimate $h_2 \dots h_N$. The regenerated interfering signals produced in this manner are subtracted from the received r_k signal in a subtraction means 52, whereby the obtained difference signal is in a way "cleaned" of co-channel interference. After this, the channel estimator EST_1 of the primary signal calculates the multipath channel estimate h_1 of the primary signal from the output of the subtraction means 52, and the detector DET_1 detects the transmitted sequence a_1 of the primary signal.

In the example of Figure 5, the interfering signals were treated as parallel processes. Alternatively, the process may be of serial type, the interfering signals being thus removed from the received signal one at a time. This serial process also enables the fact that, in practical solutions, for instance with the use of a signal processor, a single channel estimator and detector perform iteratively, one at a time, interfering signal channel estimation, detection, regeneration and subtraction from the received signal, whereby the received signal is continuously cleaned of co-channel interference at each iteration stage. When all the co-channels have been attended to (for instance $N-1$ iteration stages), the primary signal is detected in the cleaned received signal.

The accompanying figures and the description relating thereto are merely intended to illustrate the present invention. In their details, the method and the receiver of the invention may vary within the scope and spirit of the appended claims.

5

Claims

1. A signal detection method in a receiver of a TDMA mobile system, in which method a primary signal and at least one interfering co-channel signal are received on the same TDMA channel, said signals having different but known training sequences, and said signals having different multipath propagation and thus different transmission channels on the radio path, c h a r a c -
t e r i z e d by

determining the transmission channel estimates of the primary signal and said at least one interfering co-channel signal by means of the received training sequences,

detecting the primary signal by utilizing the transmission channel estimates of both the primary signal and said at least one interfering co-channel signal.

2. A method according to claim 1, c h a r a c - t e r i z e d in that the determination of the transmission channel estimates comprises cancelling the cross correlation between the training sequences from the transmission channel estimates by performing a linear transformation on the cross correlation.

3. A method according to claim 2, c h a r a c - t e r i z e d in that the linear transformation comprises an inverse cross correlation matrix of the training sequences.

4. A method according to claim 2, c h a r a c - t e r i z e d by obtaining the transmission channel estimates by means of a matrix operation from the equation

$$\hat{M}_L = (M^T M)^{-1} M^T y,$$

where y represents the received training sequences,

and the matrix $M = (M_1, M_2, \dots, M_N)$, where M_n is

P x (L+1) matrix consisting of the transmitted training sequence symbols organized as a matrix.

5 5. A method according to any one of the preceding claims, c h a r a c t e r i z e d in that the sequences of the training sequence code are cyclic transformations of a sequence having high autocorrelation, such as an m-sequence.

10 6. A method according to any one of the preceding claims, c h a r a c t e r i z e d in that the determination of the channel estimates comprises estimating the impulse responses of the transmission channels.

15 7. A method according to claim 6, c h a r a c - t e r i z e d in that the primary signal is detected by the Viterbi algorithm, which takes into account the estimates of the impulse responses of both the primary signal and said at least one interfering co-channel signal as well as those of the transmissions channels thereof.

20 8. A method according to any one of the preceding claims, c h a r a c t e r i z e d in that the primary signal and said at least one interfering co-channel signal are received essentially in sync.

25 9. A receiver of a synchronous TDMA mobile system, said receiver being arranged to receive a primary signal and at least one interfering co-channel signal on the same TDMA channel, said signals having different but known training sequences, and said signals having different multipath propagation and thus different transmission channels on the radio path, c h a r a c -
30 t e r i z e d in that the receiver comprises

 a channel estimator, arranged to determine the transmission channel estimates of the primary signal and said at least one interfering co-channel signal by means of the received training sequences, and

35 a detecting section, detecting the primary signal by utilizing the transmission channel estimates of both the primary signal and said at least one interfering co-

channel signal.

10. A receiver according to claim 9, c h a r -
a c t e r i z e d in that the transmission channel
estimates are estimates of the impulse responses of the
transmission channels.

11. A receiver according to claim 10, c h a r -
a c t e r i z e d in that the detecting section detects
the primary signal by using the Viterbi algorithm, which
takes into account the estimates of the impulse responses
of both the primary signal and said at least one
interfering co-channel signal as well as those of the
transmissions channels thereof.

12. A signal detection method in a receiver of a
TDMA mobile system, in which method a primary signal and
at least one interfering co-channel signal are received,
preferably asynchronously, on the same TDMA channel, said
signals having different but known training sequences, and
said signals having different multipath propagation and
thus different transmission channels on the radio path,
c h a r a c t e r i z e d by

determining a transmission channel estimate of
said at least one interfering co-channel signal,
regenerating an interfering signal from the
received signal by utilizing the transmission channel
estimate of the interfering co-channel signal,

subtracting the regenerated interfering co-
channel signal from the received signal,
determining a transmission channel estimate of
the primary signal, and detecting the primary signal by
using this transmission channel estimate.

13. A method according to claim 11, c h a r -
a c t e r i z e d in that there are several interfering
co-channel signals, and that the determination of the
transmission channel estimate, the signal regeneration,
and the subtraction of the regenerated co-channel signal
from the received signal are performed parallelly or
sequentially for each interfering co-channel signal before

22

the primary signal is detected.

1/3

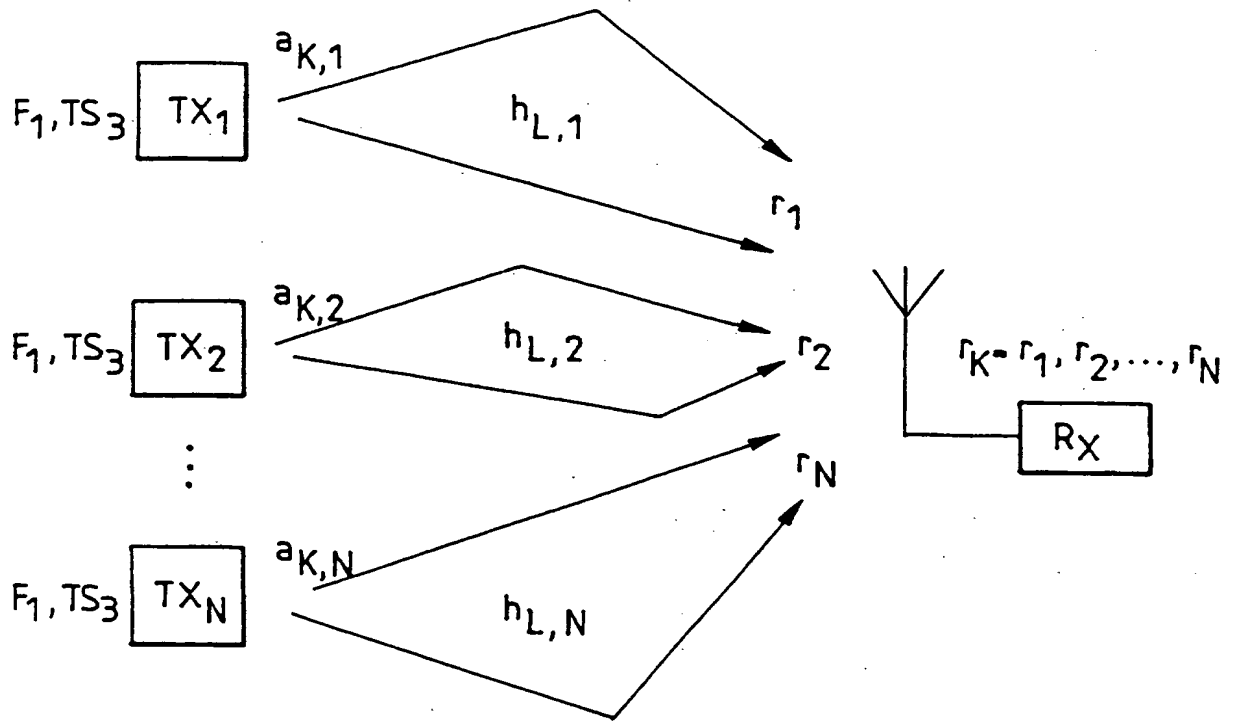


FIG. 1A

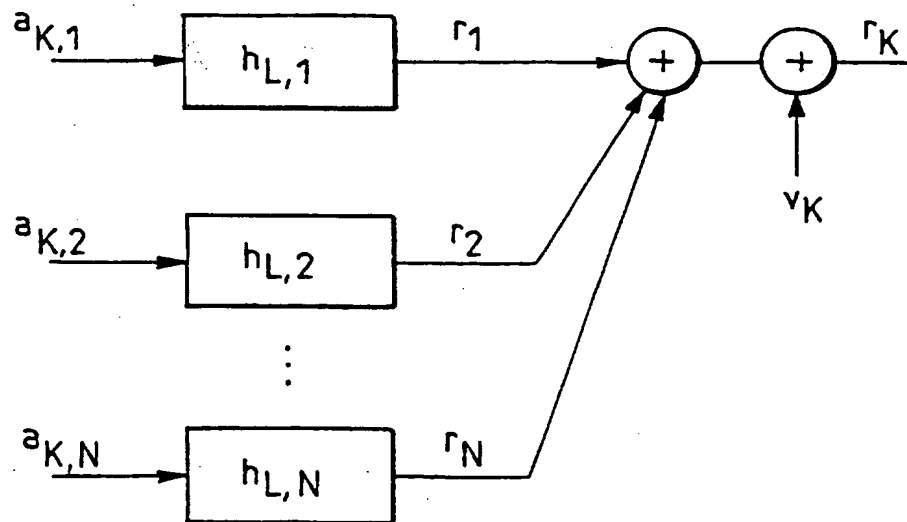


FIG. 1B

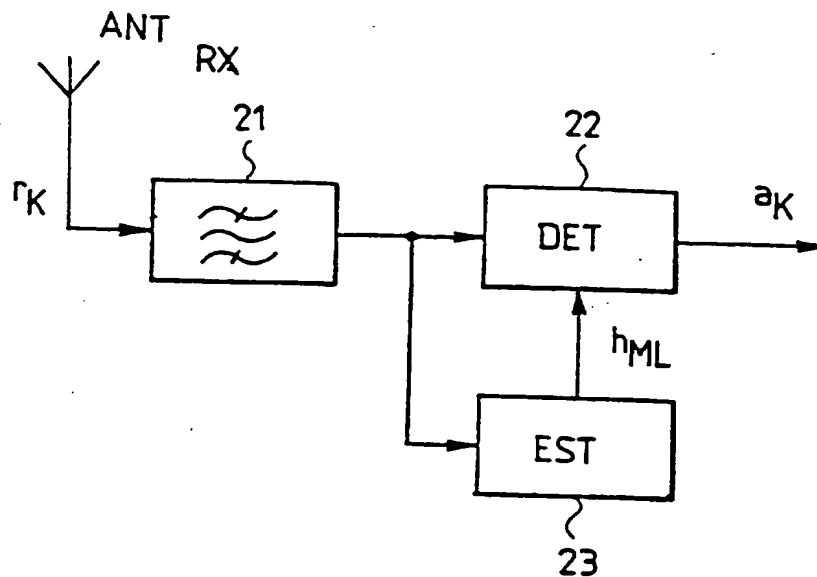


FIG. 2

FIG. 4a

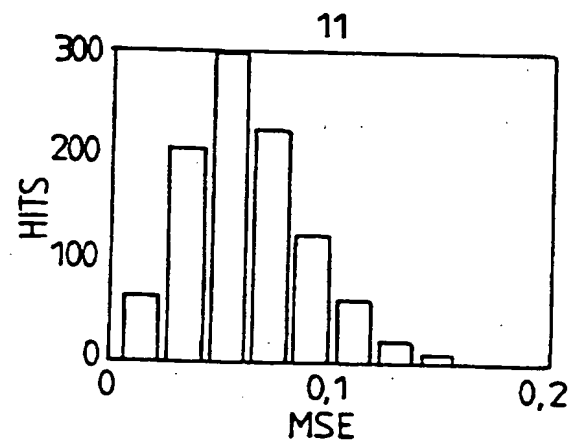


FIG. 4b

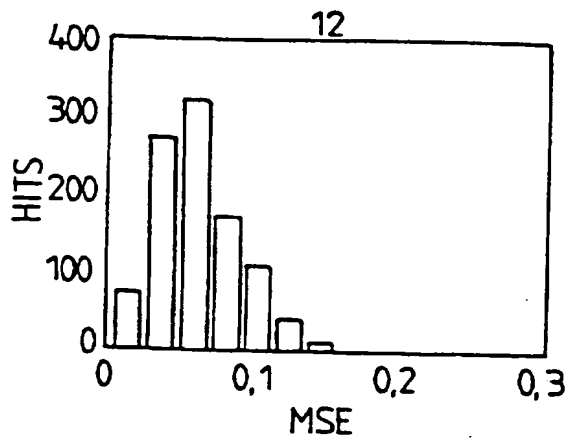
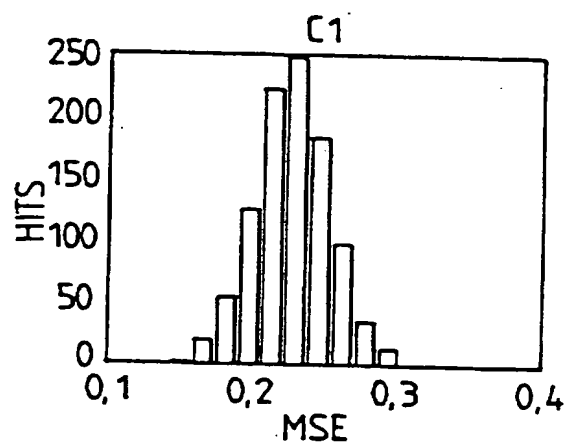


FIG. 4c

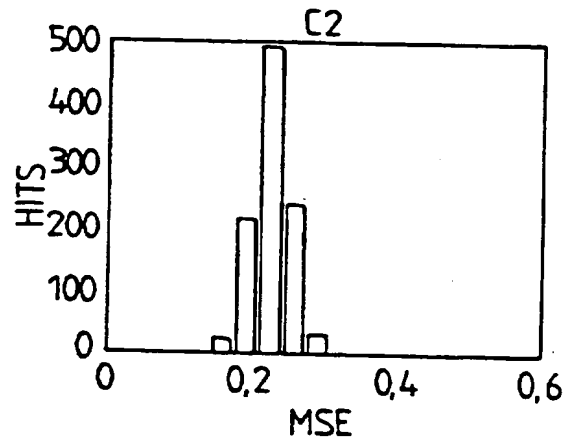


FIG. 4d

3 / 3

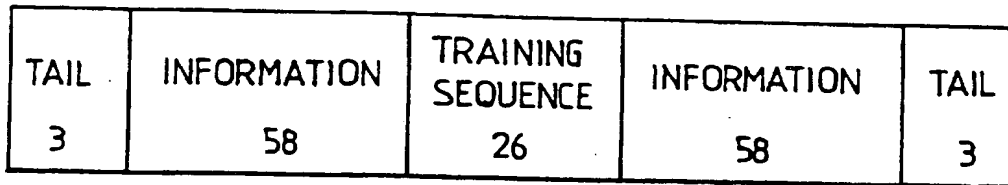


FIG. 3

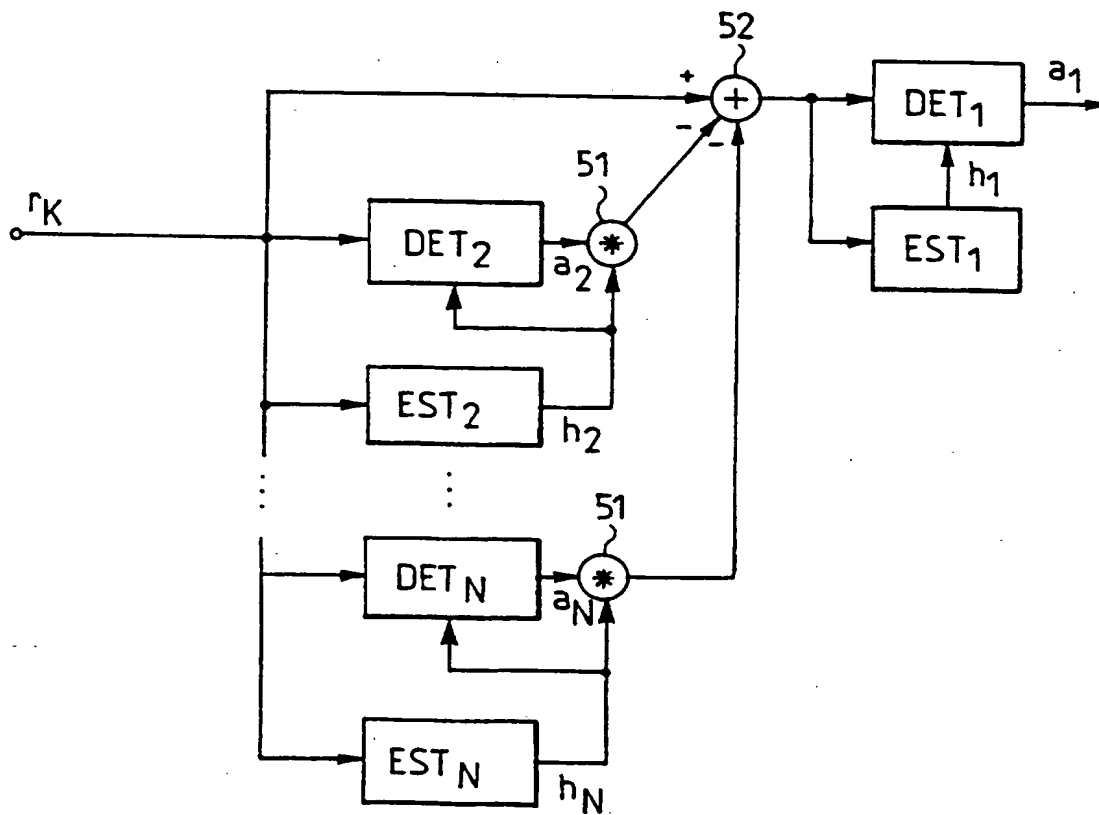


FIG. 5


THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 1/10, H04B 7/26, H04L 25/03		A3	(11) International Publication Number: WO 96/11533
			(43) International Publication Date: 18 April 1996 (18.04.96)
(21) International Application Number: PCT/FI95/00551		(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).	
(22) International Filing Date: 5 October 1995 (05.10.95)			
(30) Priority Data: 944736 7 October 1994 (07.10.94) FI			
(71) Applicants (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puistotie 1, FIN-02600 Espoo (FI). NOKIA MOBILE PHONES LTD. [FI/FI]; Nakolankatu 8, FIN-24100 Salo (FI).		Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>In English translation (filed in Finnish).</i>	
(72) Inventors; and			
(75) Inventors/Applicants (for US only): HOTTINEN, Ari [FI/FI]; Kielotie 30-32 C 25, FIN-01300 Vantaa (FI). RANTA, Pekka [FI/FI]; Servin Majan tie 10 B 18, FIN-02150 Espoo (FI). HONKASALO, ZhiChun [FI/FI]; Melkonkatu 8 B 29, FIN-00210 Helsinki (FI). JOKINEN, Harri [FI/FI]; Vähähiidentie 450, FIN-25370 Hiisi (FI).			
(74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).			
(88) Date of publication of the international search report: 13 June 1996 (13.06.96)			

(54) Title: SIGNAL DETECTION IN A TDMA SYSTEM

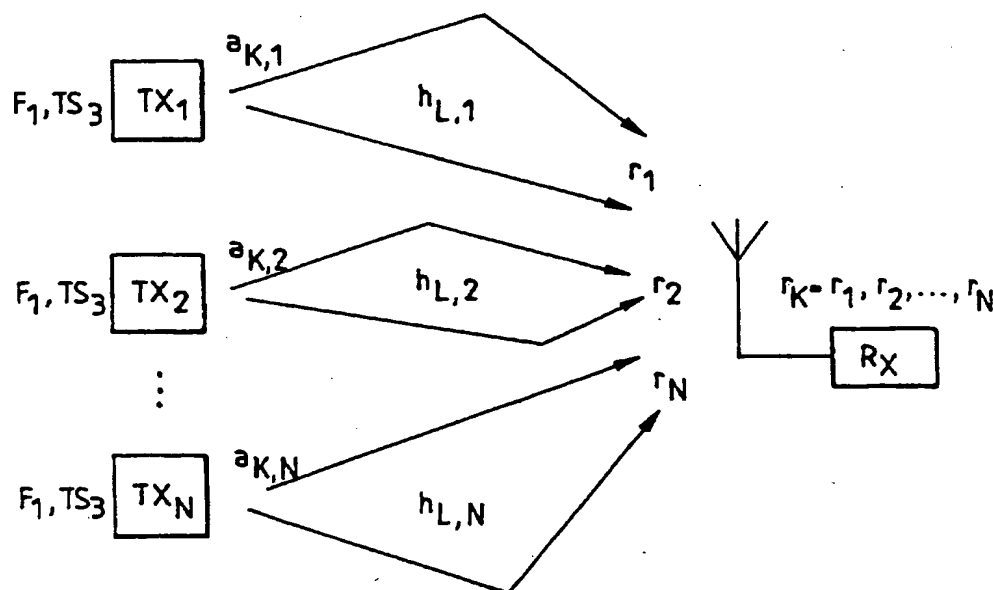

(57) Abstract

The present invention relates to an improved signal detection method in a TDMA mobile system with co-channel interference. In the method, a primary signal (r_1) and at least one interfering co-channel signal (r_2 - r_N) are received on the same TDMA channel (F_1, TS_3). The co-channel signals propagate through multipath channels ($h_{L,1}, \dots, h_{L,N}$) independent of one another, which provide them with a unique wave form coding. In addition, the co-channel signals have different but known training sequences. In the invention, the multipath channel estimates of the primary signal (r_1) and said at least one interfering co-channel signal (r_2 - r_N) are determined by means of the received training sequences. After this, the primary signal is detected by utilizing the transmission channel estimates of both the primary signal and said at least one interfering co-channel signal. The invention also relates to receivers for implementing the method of the invention.

THIS PAGE BLANK (USPTO)

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



P.B.5818 - Patentlaan 2
2280 HV Rijswijk (ZH)
☎ +31 70 340 2040
TX 31651 epo nl
FAX +31 70 340 3016

Europäisches
Patentamt

Zweigstelle
in Den Haag

European
Patent Office

Branch at
The Hague

Office européen
des brevets

Département à
La Haye

KBL

BURNS, DOANE, SWECKER & MATHIS LLP
Attn. Mr Mark E. Olds
Suite 500
1737 King Street
Alexandria, Virginia 22314-2756
UNITED STATES OF AMERICA

Aktenzeichen/File No./No. du Dossier

RS 106584 US

Datum/Date

18.10.2001

Das Europäische Patentamt übermittelt hiermit den Standardrecherchenbericht zu dem unten bezeichneten Antrag; Kopien der im Recherchenbericht angeführten Schriften werden in der Anlage beigelegt.

The European Patent Office herewith transmits the Standard Search Report relating to the request indicated below; copies of the documents cited in the search report are enclosed.

L'Office Européen des Brevets à l'honneur de vous transmettre ci-joint le Rapport de Recherche concernant la demande désignée ci-dessous; des copies des documents cités sont jointes.

Zeichen und Datum des Antrages Applicant's reference and date Références et date de la demande	040071-266
Dokument, Gegenstand der Recherche Document subject of the search Objet de la recherche	USA 779553
Einreichungstag Filing date Date de dépôt	09/02/2001
Beanspruchte Priorität Priority claimed Priorité revendiquée	

COM 10/23/01

22 2001

OFFICE EUROPÉEN DES BREVETS
Pour le Vice-Président,

R. de Best

THIS PAGE BLANK (USPTO)



DOCUMENTS CONSIDERED TO BE RELEVANT														
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim												
X	WO 96 11533 A (NOKIA) 18 April 1996 (1996-04-18) * page 1, line 26 - line 31 * * page 16, line 20 - line 22 * * page 17, line 24 - line 35 *	1-28												
A	WO 98 38750 A (ERICSSON) 3 September 1998 (1998-09-03) * page 5, line 17 - line 21 * * figure 6 *	1-28												
A	US 6 167 081 A (PORTER ET AL.) 26 December 2000 (2000-12-26) * figures 3-5 *	1-28												
A	US 6 151 487 A (IN-KYUNG KIM ET AL) 21 November 2000 (2000-11-21) * figures 2,6 *	1-28												
E	WO 01 45289 A (ERICSSON) 21 June 2001 (2001-06-21) * page 2, line 23 - line 25 * * page 3, line 5 - line 7 *	1-28												
The present search report has been drawn up for all claims														
Date of completion of the search 12 October 2001		Examiner Scriven, P												
<table border="0"><tr><td>CATEGORY OF CITED DOCUMENTS</td><td>T : theory or principle underlying the invention</td></tr><tr><td>X : particularly relevant if taken alone</td><td>E : earlier patent document, but published on, or after the filing date</td></tr><tr><td>Y : particularly relevant if combined with another document of the same category</td><td>D : document cited in the application</td></tr><tr><td>A : technological background</td><td>L : document cited for other reasons</td></tr><tr><td>O : non-written disclosure</td><td>& : member of the same patent family, corresponding document</td></tr><tr><td>P : intermediate document</td><td></td></tr></table>			CATEGORY OF CITED DOCUMENTS	T : theory or principle underlying the invention	X : particularly relevant if taken alone	E : earlier patent document, but published on, or after the filing date	Y : particularly relevant if combined with another document of the same category	D : document cited in the application	A : technological background	L : document cited for other reasons	O : non-written disclosure	& : member of the same patent family, corresponding document	P : intermediate document	
CATEGORY OF CITED DOCUMENTS	T : theory or principle underlying the invention													
X : particularly relevant if taken alone	E : earlier patent document, but published on, or after the filing date													
Y : particularly relevant if combined with another document of the same category	D : document cited in the application													
A : technological background	L : document cited for other reasons													
O : non-written disclosure	& : member of the same patent family, corresponding document													
P : intermediate document														

TECHNICAL FIELDS
SEARCHED (Int.CL.7)
H04L
H04B



DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim
X	WO 96 11533 A (NOKIA) 18 April 1996 (1996-04-18) * page 1, line 26 - line 31 * * page 16, line 20 - line 22 * * page 17, line 24 - line 35 *	1-28
A	WO 98 38750 A (ERICSSON) 3 September 1998 (1998-09-03) * page 5, line 17 - line 21 * * figure 6 *	1-28
A	US 6 167 081 A (PORTER ET AL.) 26 December 2000 (2000-12-26) * figures 3-5 *	1-28
A	US 6 151 487 A (IN-KYUNG KIM ET AL) 21 November 2000 (2000-11-21) * figures 2,6 *	1-28
E	WO 01 45289 A (ERICSSON) 21 June 2001 (2001-06-21) * page 2, line 23 - line 25 * * page 3, line 5 - line 7 *	1-28
The present search report has been drawn up for all claims		TECHNICAL FIELDS SEARCHED (Int.CL.7) H04L H04B
Date of completion of the search 12 October 2001		Examiner Scriven, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons ----- &: member of the same patent family, corresponding document</p>		

THIS PAGE BLANK (USPTO)

ANNEX TO THE STANDARD SEARCH REPORT NO.

RS 106584

This annex lists the patent family members relating to the patent documents cited in the above-mentioned search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-10-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9611533	A	18-04-1996	FI 944736 A	08-04-1996
			AU 697708 B2	15-10-1998
			AU 3654795 A	02-05-1996
			EP 0784887 A2	23-07-1997
			WO 9611533 A2	18-04-1996
			JP 10507598 T	21-07-1998
			NO 971545 A	04-06-1997
			US 5995499 A	30-11-1999
WO 9838750	A	03-09-1998	US 5933768 A	03-08-1999
			AU 6640698 A	18-09-1998
			CN 1249864 T	05-04-2000
			EP 1012991 A1	28-06-2000
			JP 2001513956 T	04-09-2001
			WO 9838750 A1	03-09-1998
US 6167081	A	26-12-2000	EP 1081904 A2	07-03-2001
US 6151487	A	21-11-2000	NONE	
WO 0145289	A	21-06-2001	WO 0145289 A1	21-06-2001

THIS PAGE BLANK (USPTO)